Multi-mode 1.25Gbps 2X5 SFF Transceiver

Features

- LC duplex receptacle
- Standard 2 x 5 footprint
- 850nm VCSEL transmitter with automatic power control
- AC or DC coupled LVPECL/PECL compatible data input and output
- Transmitter disable input
- PECL or TTL signal detect output
- Single 3.3V or 5V power supply

Specifications

Parameter		Symbol	Min.	Typ.	Max.	Unit
Transmitter						
Data Rate (NRZ)		B	-	1250	-	Mb/s
Optical Output Power (avg.) (1) (2) (3)		P_o	-9.5	-	-3	dBm
Extinction Ratio (2)		ER	9	-	-	dB
Optical Wavelength (2)		λ_C	830	850	860	nm
Spectral Width (RMS) (2)		$\Delta\lambda$	-	-	0.85	nm
Output Rise Time (20-80%) (2)		t_r	-	-	0.26	ns
Output Fall Time (20-80%) (2)		t_f	-	-	0.26	ns
Data Input (7)	DC Coupled	V_{IL} V_{IH}	V_{CC} -1.810 V_{CC} -1.165	- -	V_{CC} -1.475 V_{CC} -0.880	V V
	AC Coupled (Differential)	V_I	0.25	-	1.6	V
Tx Disable Input		V_{DIL} V_{DIH}	0 2	- -	0.8 V_{CC}	V
Supply Voltage		V_{CC}	3.10 4.75	3.3 5.0	3.50 5.25	V V
Supply Current		I_{CC}	-	-	110	mA
Receiver						
Data Rate (NRZ)		B	-	1250	-	Mb/s
Optical Input Sensitivity (avg.) (1) (2) (5)		P_{IN}	-	-	-17	dBm
Saturation		P_{SAT}	-3	-	-	dBm
Optical Wavelength		λ	770	850	860	nm
Output Rise Time (20-80%)		t_r	-	-	0.4	ns
Output Fall Time (20-80%)		t_f	-	-	0.4	ns
Data Output (7)	DC Coupled	V_{OL} V_{OH}	V_{CC} -1.840 V_{CC} -1.045	- -	V_{CC} -1.62 V_{CC} -0.88	V V
	AC Coupled (Differential)	V_I	0.6	-	1.8	V
Signal Detect Asserted (avg.)		P_A	-	-	-17	dBm
Signal Detect Deasserted (avg.)		P_D	-27	-	-	dBm
Signal Detect Hysteresis		P_{HYS}	-	2	-	dB
Supply Voltage		V_{CC}	3.10 4.75	3.3 5.0	3.50 5.25	V V
Supply Current		I_{CC}	-	-	100	mA

Multi-mode 1.25Gbps 2X5 SFF Transceiver

Notes：

(1) With 0.275 NA, 62.5/125μm fiber.
(2) Compliant to IEEE802.3z Gigabit Ethernet 1000BASE-SX.
(3) Class 1 eye safe per FDA and IEC.
(4) Transmitter eye mask diagram is compliant to IEEE802.3z Eye Diagram.
(5) 2^7 -1 PRBS, BER= 10^{-12}.
(6) The transmitter output should not be viewed directly.
(7) Compatible with PECL and LVPECL logic levels.

Absolute Maximum Ratings

Parameter		Min.	Max.	Unit
Operating Temperature	-1	0	70	°C
	-2	-40	85	°C
Storage Temperature		-40	100	°C
Lead Soldering Limits		-	240/10	°C /sec
Supply Voltage	5V	-0.2	7	V
	3.3V	-0.2	4	V

Ordering Information

SNS-T R 8 5 M M 3 - 1 V L C □ A R 1 □ □

Operating Temperature Range：
1：0 ~ 70°C
2：-40 ~ 85°C

Data Coupling & SD Output Level：

Symbol	Tx Coupling	Rx Coupling	SD
C	AC	DC	PECL
D	AC	DC	TTL
E	AC	AC	PECL
F	AC	AC	TTL
G	DC	DC	PECL
H	DC	DC	TTL
I	DC	AC	PECL
J	DC	AC	TTL

Supply Voltage：
5：5V
3：3.3V

Multi-mode 1.25Gbps 2X5 SFF Transceiver

Maximum Reach for 1000BASE-SX

Fiber Type	Modal Bandwidth @ 850nm (min. overfilled launch) (MHz·km)	Recommended Maximum Reach (Note) (meters)
62.5 μm MMF	160	220
62.5 μm MMF	200	275
50 μm MMF	400	500
50 μm MMF	500	550

Note：Maximum reach as defined by IEEE 802.3z Gigabit Ethernet 1000BASE-SX standard.

Outline Drawing

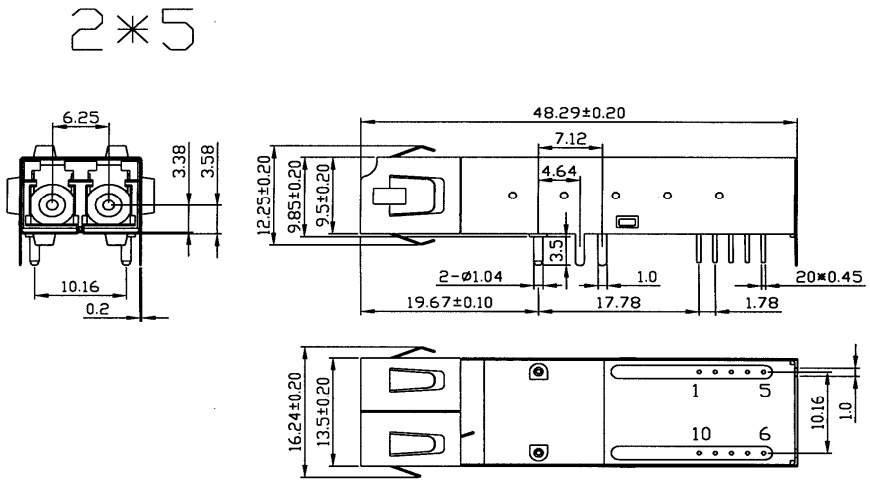

UNIT：mm

Pinout Description

Pin No.	Symbol	Description
1	V_{EER}	Receiver Ground
2	V_{CCR}	Receiver Power Supply (5V/3.3V)
3	SD	Receiver Signal Detect
4	RD-	Receiver Data Out (Inverted)
5	RD+	Receiver Data Out
6	V_{CCT}	Transmitter Power Supply (5V/3.3V)
7	V_{EET}	Transmitter Ground
8	TDis	Input Logic Low Level to Switch Laser “ON” Input Logic High Level to Switch Laser “OFF”
9	TD+	Transmitter Data in
10	TD-	Transmitter Data In (Inverted)

Multi-mode 1.25Gbps 2X5 SFF Transceiver

Application Notes

Recommended AC Coupling Interface Circuit：

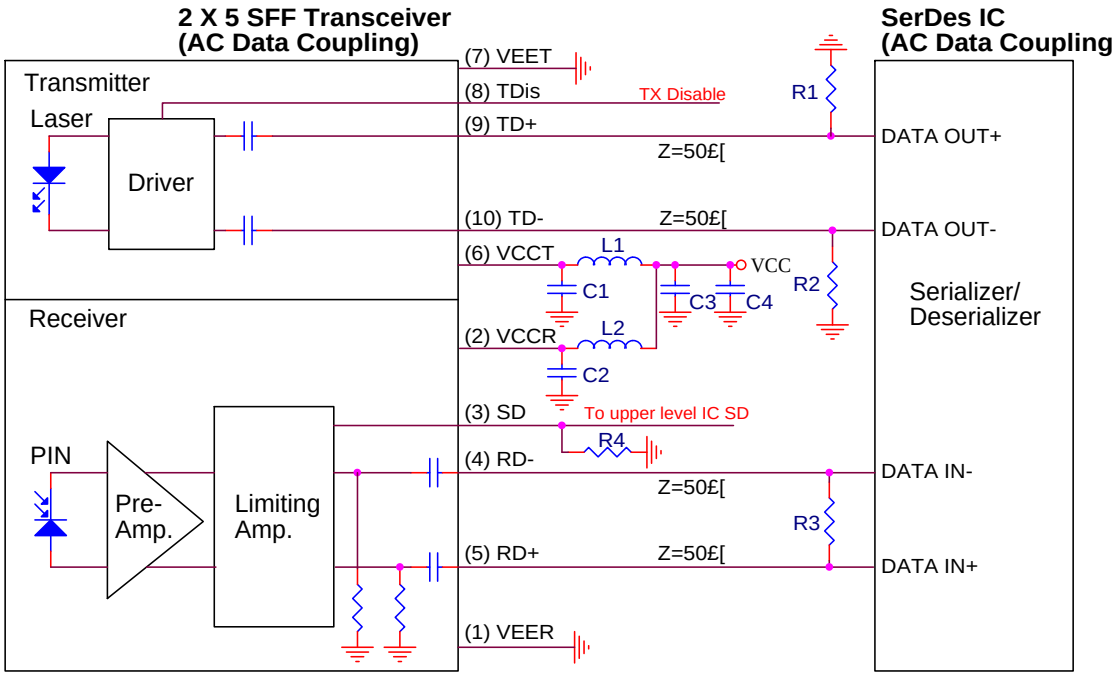

L1=L2=1£gH or ferrite bead
C1=C2=C3=0.1£gF
C4=10£gF
R1, R2, R3 depends on SerDes IC specification.
(Consult the SerDes IC application information)
R4=510£[

NOTE¡G
1. Transmission line characteristic impedance Z=50£[.
2. R1, R2, R3 as close to SerDes IC as possible.

Multi-mode 1.25Gbps 2X5 SFF Transceiver

Recommended DC Coupling Interface Circuit：

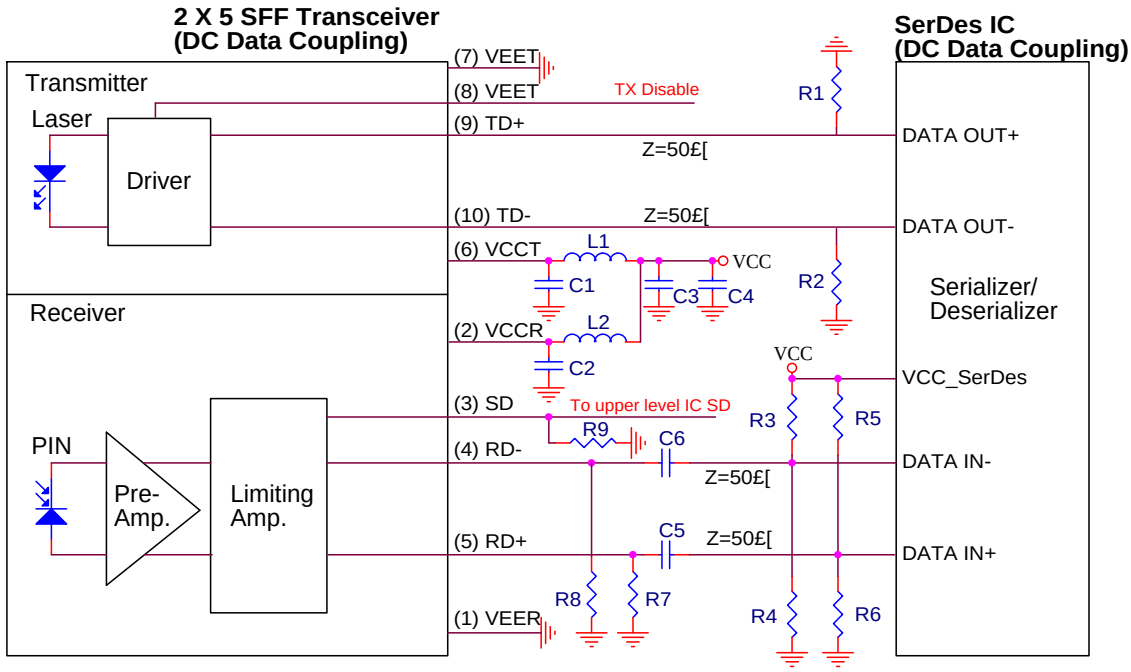

L1=L2=1£gH or ferrite bead
C1=C2=C3=C5=C6=0.1£gF
C4=10£gF
R1, R2, R3, R4, R5, R6 depends on SerDes IC specification.
(Consult the SerDes IC application information)
R7=R8=270£[(VCC=3.3V)
=510£[(VCC=5V)
R9=510£[

NOTE¡G
1. Transmission line characteristic impedance Z=50£[.
2. R1, R2, R3, R4, R5, R6 as close to SerDes IC as possibl
3. R7, R8 as close to 1X9 Transceiver as possible.