2.5Gbps 1310nm FP Laser Diode SM Module

Features

- Center wavelength 1310nm
- Low threshold current
- High speed t_r/t_f < 0.12ns
- Built-in InGaAs monitor detector
- Four-lead package
- Wide operating temperature -20°C to 85°C
- Hermetically sealed TO-18 package in pigtailed or receptacle housing with FC, ST or SC connector

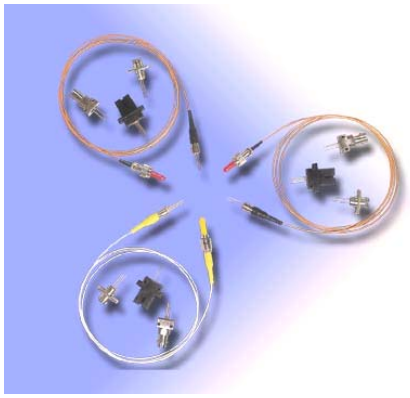

Applications

- Fiber In The Loop
- ATM, SONET/SDH
- Motorway and railway networks
- Intra and interoffice links
- Subscriber loops
- Trunk supervision
- Test instruments

Specifications

Optical And Electrical Characteristics (T=25+/-3 °C unless specified otherwise)

Parameter	Symbol	Test Conditions	Min	Typical	Max	Units
Threshold Current	I_{th}	Po 85 °C	-	10	15 30	mA
Operating Voltage	V_{op}	Po	-	1.1	1.8	V
Peak Wavelength	λc	Po, -20~85°C	1290	1310	1330	nm
Spectral Width				1	3	nm
Optical Output Power	P_0	I_{th}+20mA				
-3			1	-	-	mW
-4			1.4	-	-	mW
Differential Efficiency		P_0				
-3			0.1	-	-	W/A
-4			0.14	-	-	W/A
Rise/Fall Time	tr/tf	2.5Gbps, 20~80%	-	80	120	ps
Tracking Error	TE	-20~+85 °C		±1.0		dB
Monitor Current (PD)	I_m	Po, V_{RD} =1V	0.1	0.5	-	mA
Dark Current (PD)	I_d	V_{RD}=5V	-	-	0.1	μA
Capacitance (PD)	Ct	V_{RD}=5V, f=1MHz	-	10	20	pF
Return Loss			40	-	-	dB
Minimum Isolation (w/isolator)		To= 0~+60 °C	30	-	-	dB

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Forward Current (LD)	I_{op}	-	85	mA
Reverse Voltage (LD)	V_{RL}	-	2	V
Reverse Voltage (PD)	V_{RD}	-	20	V
Forward Current (PD)	I_{FD}	-	2	mA
Case Temperature	T_o	-20	+85	°C
Storage Temperature	T_{stg}	-40	+100	°C
Lead Soldering Temperature (10see)	T_L	-	260	°C

2.5Gbps 1310nm FP Laser Diode SM Module

Ordering Information

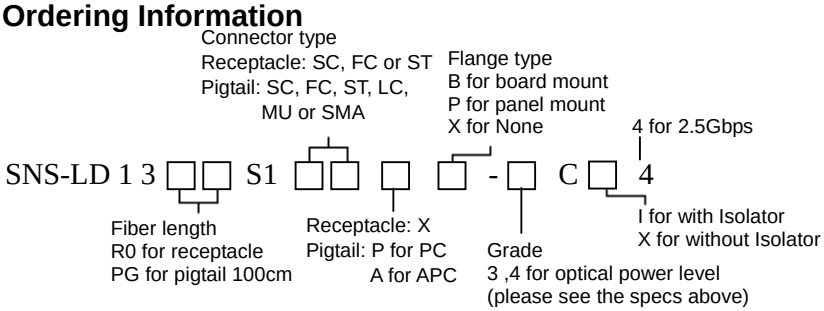

Pin Connections

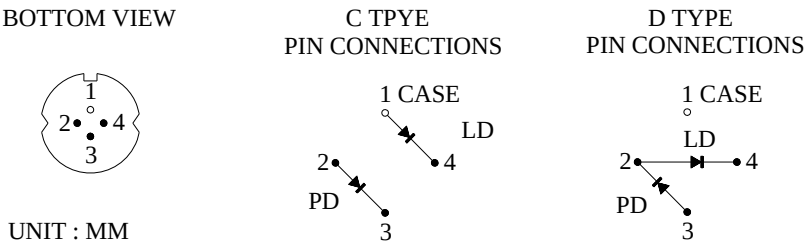

Dimension

Pigtail Type

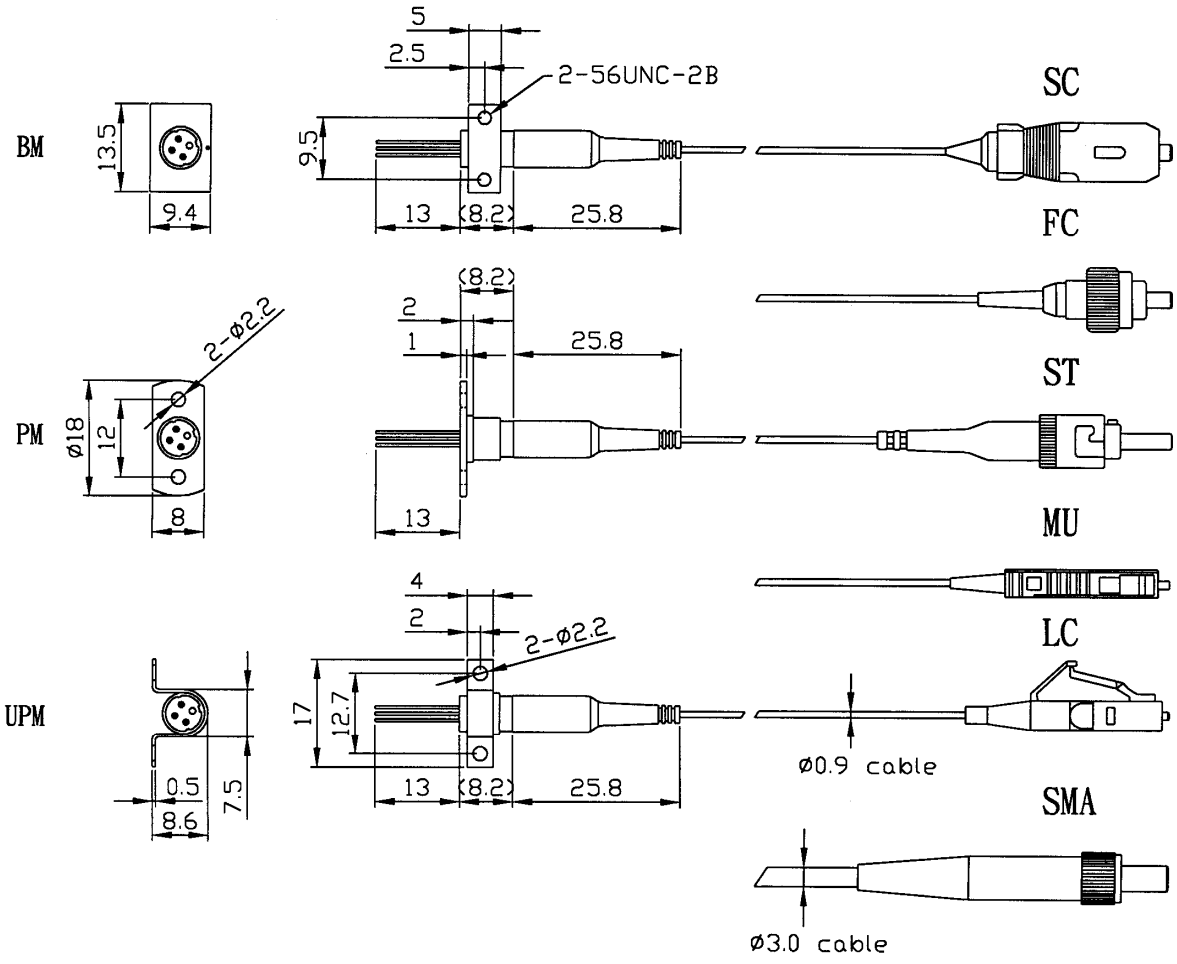

2.5Gbps 1310nm FP Laser Diode SM Module

Receptacle Type

FC-PM

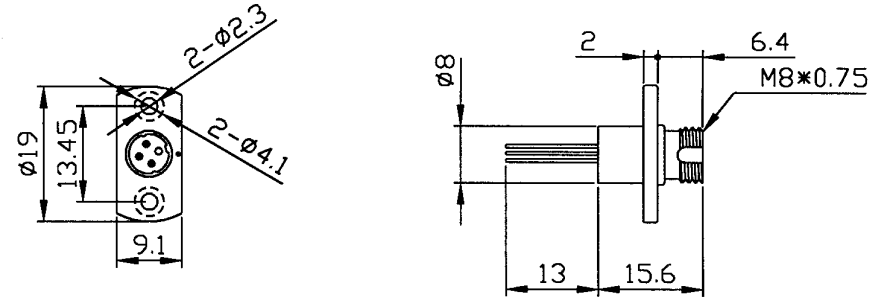

FC-BM

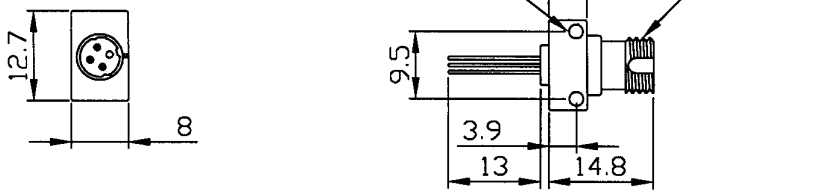

ST-BM

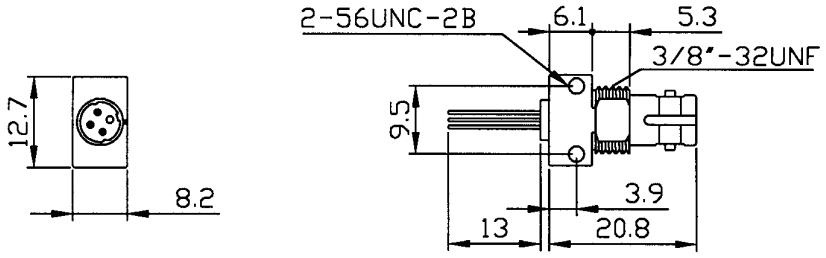

ST-PM

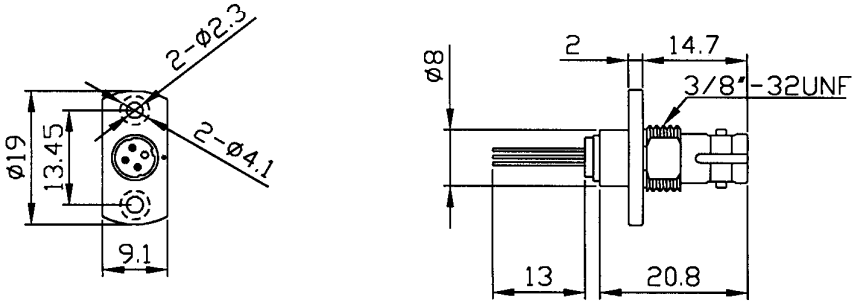

SC

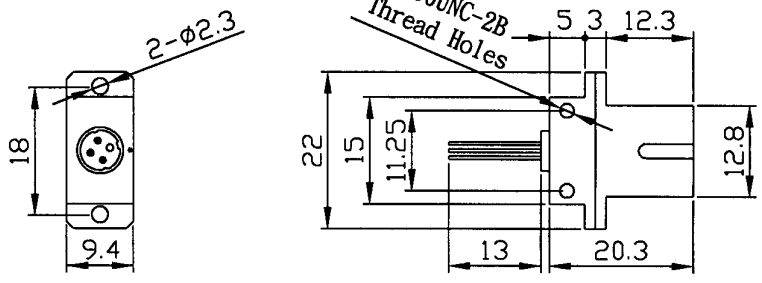

Sugar Cube

Dimension (ST Receptacle) Unit mm

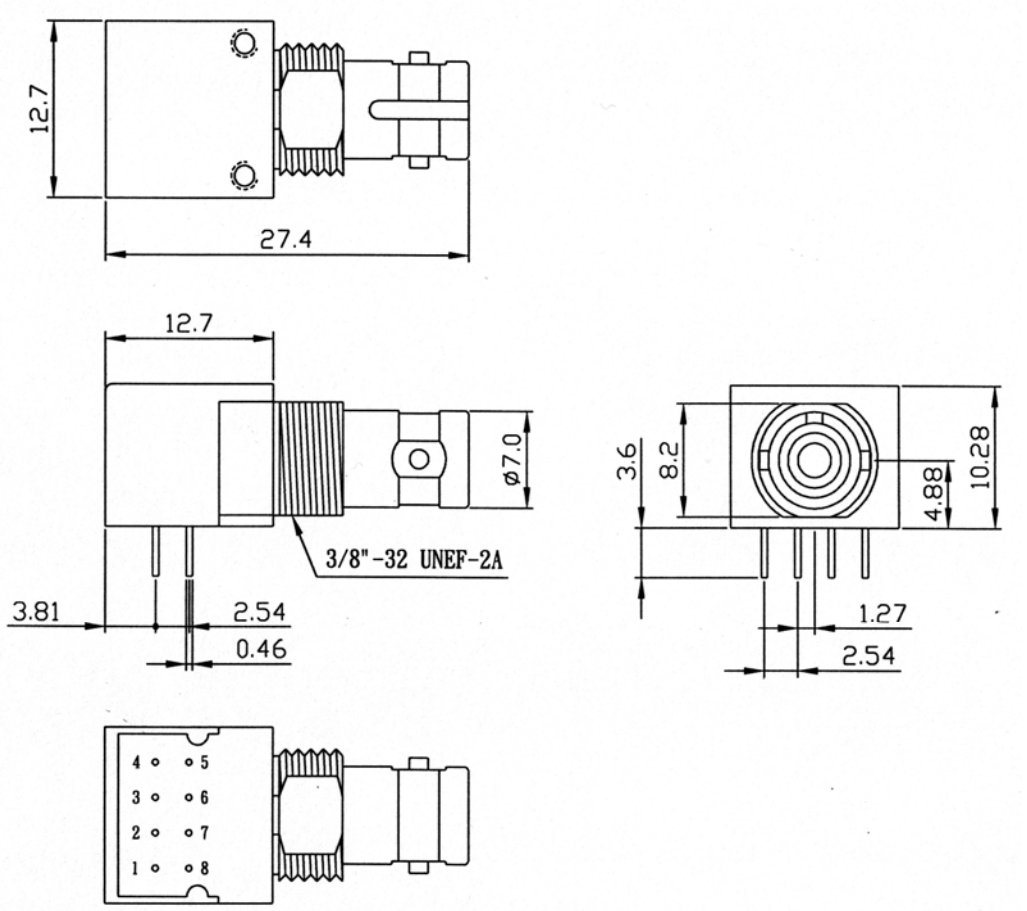

Pin Connections (Type A)

PIN No.	FUNCTION
1	NC
2	ANODE
3	CATHODE
4	NC
5	NC
6	ANODE or NC
7	ANODE or NC
8	NC

Pin Connections (Type B)

PIN No.	FUNCTION
1	NC
2	NC
3	LD Cathode (LD-)
4	NC
5	NC
6	LD Anode (LD+), PD-
7	Monitor PD Anode (PD+)
8	NC
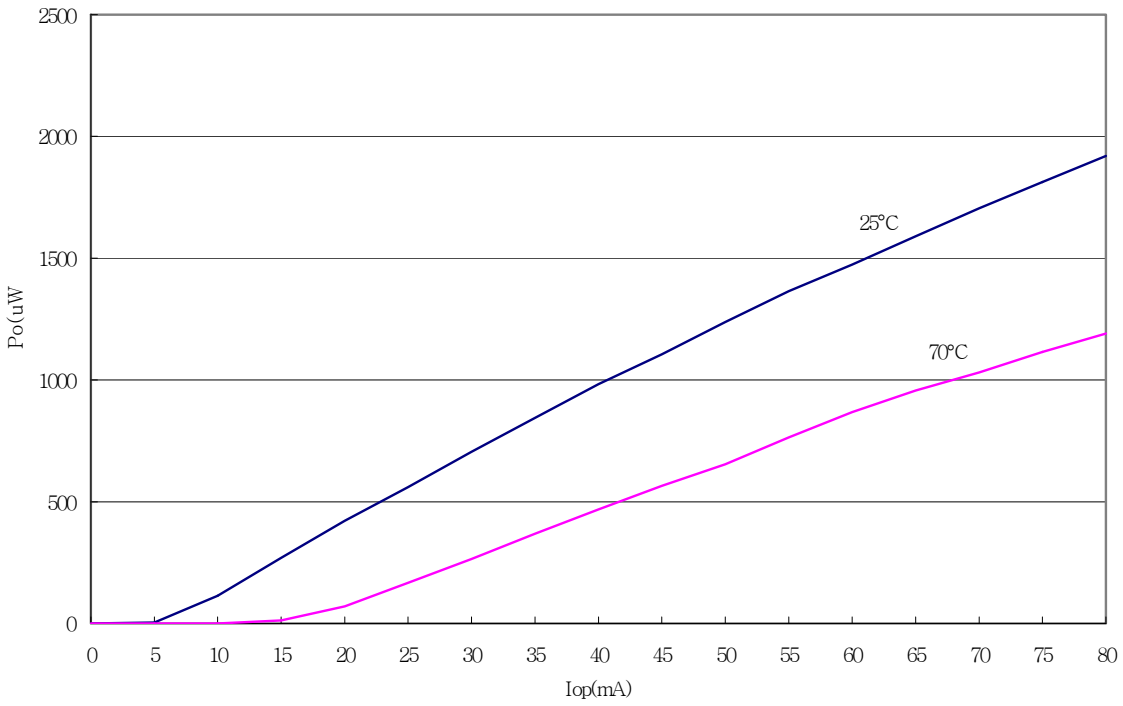
1310nm FP LD
Fiber-coupled Power vs. Drive Current