Singlemode 622Mbps Bi-Directional Single Fiber 2x5 SFF Optical Transceiver

Features

- Intermediate and long reach
- Industrial standard 2 x 5 pin footprint
- Single SC/ST/FC connector interface
- Receiver signal detect function
- Wide dynamic rang receiver with AGC
- PECL/LVPECL logic interface, DC or AC coupling
- Single supply 5V/3.3V
- Low power consumption

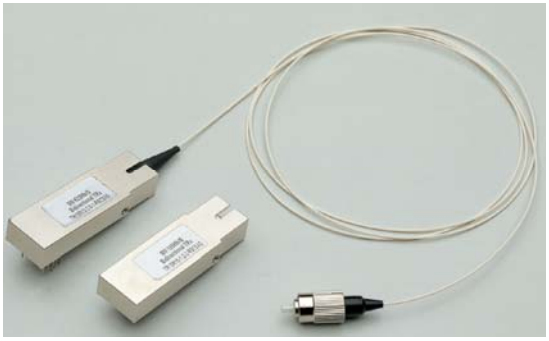

Specifications

Parameter	Symbol	Min.	Typ.	Max.	Unit
Transmitter					
Data rate (NRZ)	B	-	622	-	Mb/s
Optical Output Power (avg.) (1) (3)					
-1	Po	-15	-	-8	dBm
-2	Po	-8	-	-3	dBm
-3	Po	-3	-	0	dBm
Extinction Ratio	ER	8.3	-	-	dB
Optical Wavelength					
TR13R15 (1310nm FP LD)	λ_C	1260	1310	1360	nm
TR31R15 (1310nm DFB LD)	λ_C	1290	1310	1330	nm
TR15R13 (1550nm FP LD)	λ_C	1490	1550	1610	nm
TR55R13 (1550nm DFB LD)	λ_C	1530	1550	1570	nm
Spectral Width					
TR13R15 (RMS) TR15R13 (RMS)	$\Delta\lambda$	-	1.0	2.5	nm
TR31R15 (-20dB) TR55R13 (-20dB)	$\Delta\lambda$	-	-	1	nm
Side Mode Suppression Ratio					
TR31R15 TR55R13	SMSR	30	-	-	dB
Output risetime (10-90%)	t_r	-	0.5	0.8	ns
Output falltime (10-90%)	t_f	-	0.5	0.8	ns
Data Input (6)	V_{IL} V_{IH}	V_{CC} -1.810 V_{CC} -1.165	- -	V_{CC} -1.475 V_{CC} -0.880	V
Tx Disable Input	V_{DIL} V_{DIH}	0 2	- -	0.8 V_{CC}	V
Supply voltage	V_{CC}	4.75 3.10	5.0 3.3	5.25 3.50	V
Supply current	I_{CC}	-	-	110	mA

Singlemode 622Mbps Bi-Directional Single Fiber 2x5 SFF Optical Transceiver

Parameter	Symbol	Min.	Typ.	Max.	Unit
Receiver					
Data rate (NRZ)	B	-	622	-	Mb/s
Optical input (avg.) sensitivity (1) (5)					
-1	P_{IN}	-	-24	-22	dBm
-2	P_{IN}	-	-28	-25	dBm
Saturation	P_{SAT}	-3	0	-	dBm
Optical Wavelength					
TR13R15 TR31R15	λ	1500	1550	1600	nm
TR15R13 TR55R13	λ	1100	1310	1350	nm
Output risetime (10-90%)	t_r	-	0.5	0.8	ns
Output falltime (10-90%)	t_f	-	0.5	0.8	ns
Data output (6)	V_{OL} V_{OH}	V_{CC} -1.840 V_{CC} -1.045	- -	V_{CC} -1.62 V_{CC} -0.88	V
Signal detect asserted (avg.)	P_A	-	-	-22	dBm
Signal detect deasserted (avg.)	P_D	-35	-	-	dBm
Hysteresis	P_{HYS}	-	3	-	dB
Supply voltage	V_{CC}	4.75 3.10	5.0 3.3	5.25 3.50	V
Supply current	I_{CC}	-	-	100	mA
Optical Return Loss	RL	50	-	-	dB
Optical CrossTalk	CT	30	-	-	dB

Note：

(1) With 0.275 NA, 9/125μm fiber.
(2) Driven with a differential signal.
(3) Class 1 eye safe per FDA and IEC.
(4) Eye mask diagram is compliant to ITU-T G.957 Eye Diagram.
(5) 2^{23} -1 PRBS, BER= 10^{-10}
(6) Compatible with PECL and LVPECL logic levels.
(7) Mates with optical connectors meeting JIS C 5973.
(8) The transmitter output should not be viewed directly.

Absolute Maximum Ratings

Parameter		Min.	Max.	Unit
Operating Temperature	-1	0	70	°C
	-2	-40	85	°C
Storage Temperature		-40	100	°C
Lead Soldering Limits		-	240/10	°C /sec
Supply Voltage	5V	-0.2	7	V
	3.3V	-0.2	4	V

Singlemode 622Mbps Bi-Directional Single Fiber 2x5 SFF Optical Transceiver

Ordering Information

T R □□ R □□ - 2 - □ - □ □ □ □ □ S □ □

Operating Temperature Range：
1：0 ~ 70°C
2：-40 ~ 85°C

Data Coupling & SD Output Level：

Symbol	Tx Coupling	Rx Coupling	SD
C	AC	DC	PECL
D	AC	DC	TTL
E	AC	AC	PECL
F	AC	AC	TTL
G	DC	DC	PECL
H	DC	DC	TTL
I	DC	AC	PECL
J	DC	AC	TTL

Supply Voltage：
5：5V
3：3.3V

Connector Type：
SC：SC Connector
FC：FC Connector
ST：ST Connector

Package Type：
P：Pigtail
R：Receptacle

Sensitivity Grade：
(refer to Specifications)
1：-1
2：-2

Tx Output Power Grade：
(refer to Specifications)
1：-1
2：-2
3：-3

Receiver Wavelength：
13：1310nm (FP LD)
15：1550nm (FP LD)
31：1310nm (DFB LD)
55：1550nm (DFB LD)

Transmitter Wavelength：
13：1310nm (FP LD)
15：1550nm (FP LD)
31：1310nm (DFB LD)
55：1550nm (DFB LD)

Singlemode 622Mbps Bi-Directional Single Fiber 2x5 SFF Optical Transceiver

Outline Drawing

Pigtail 2x5 pins SFF

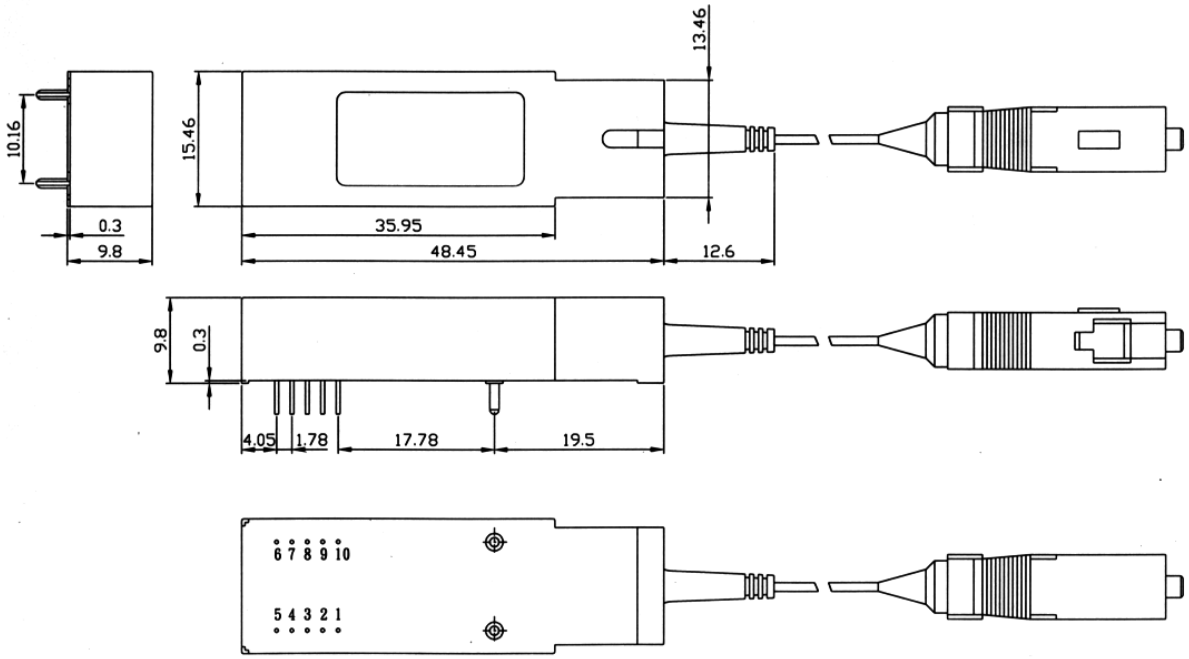

UNIT：mm

Singlemode 622Mbps Bi-Directional Single Fiber 2x5 SFF Optical Transceiver

Receptacle 2x5 pins SFF

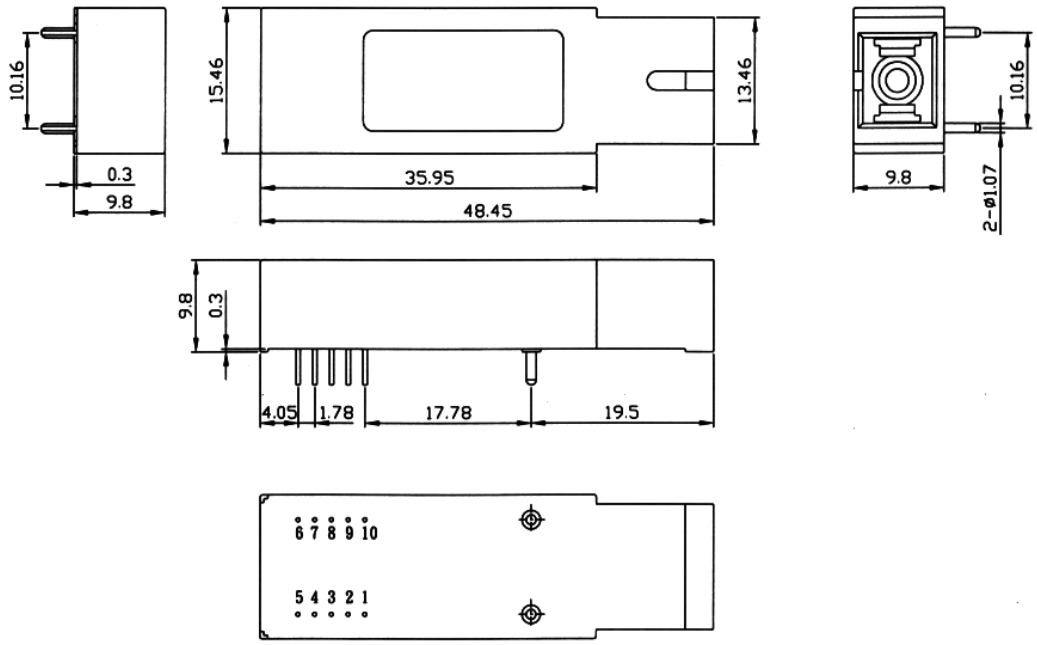

UNIT：mm

Singlemode 622Mbps Bi-Directional Single Fiber 2x5 SFF Optical Transceiver

Pinout Description

Pin No.	Symbol	Description
1	V_{EER}	Receiver Ground
2	V_{CCR}	Receiver Power Supply (5V/3.3V)
3	SD	Receiver Signal Detect
4	RD-	Receiver Data Out (Inverted)
5	RD+	Receiver Data Out
6	V_{CCT}	Transmitter Power Supply (5V/3.3V)
7	V_{EET}	Transmitter Ground
8	TDis	Input Logic Low Level to Switch Laser “ON” Input Logic High Level to Switch Laser “OFF”
9	TD+	Transmitter Data in
10	TD-	Transmitter Data In (Inverted)

Application Notes

Recommended AC Coupling Interface Circuit：

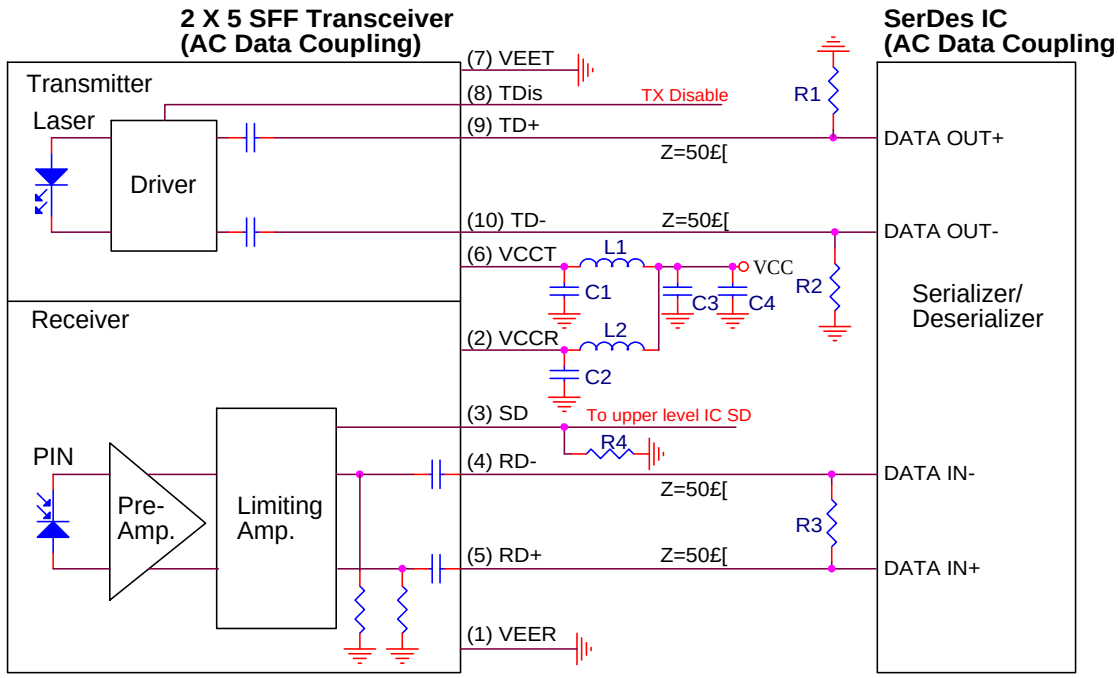

L1=L2=1£gH or ferrite bead
C1=C2=C3=0.1£gF
C4=10£gF
R1, R2, R3 depends on SerDes IC specification.
(Consult the SerDes IC application information)
R4=510£[

NOTE¡G
1. Transmission line characteristic impedance Z=50£[.
2. R1, R2, R3 as close to SerDes IC as possible.

Singlemode 622Mbps Bi-Directional Single Fiber 2x5 SFF Optical Transceiver

Recommended DC Coupling Interface Circuit：

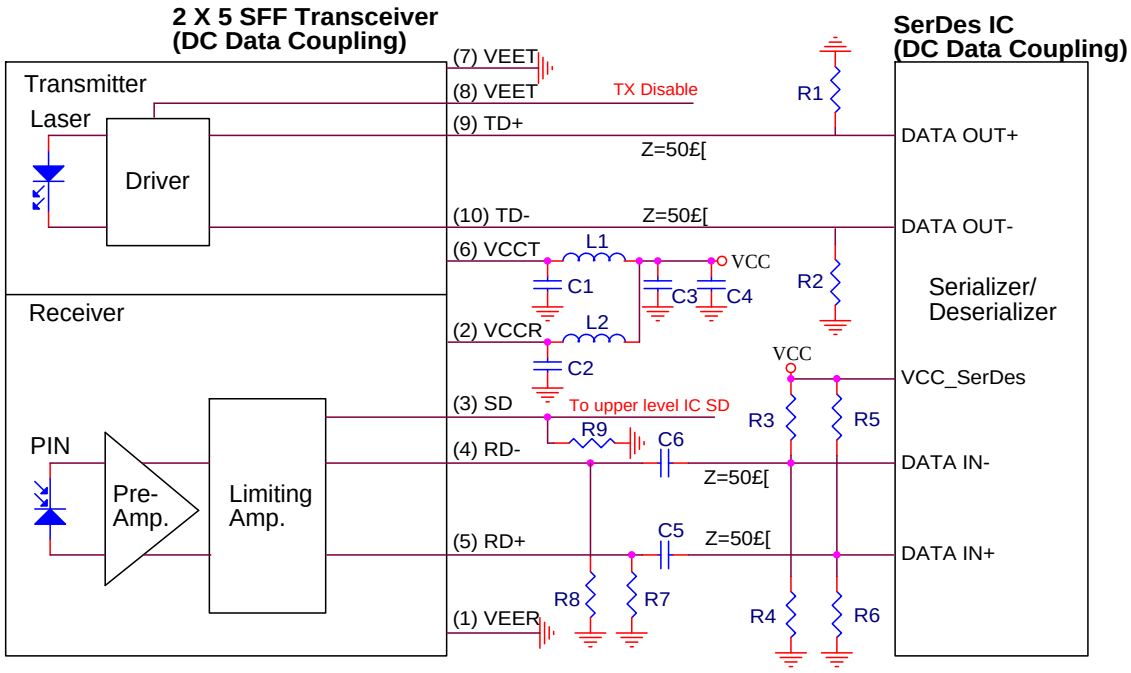

L1=L2=1£gH or ferrite bead
C1=C2=C3=C5=C6=0.1£gF
C4=10£gF
R1, R2, R3, R4, R5, R6 depends on SerDes IC specification. (Consult the SerDes IC application information)
R7=R8=270£[(VCC=3.3V)
=510£[(VCC=5V)
R9=510£[

NOTE¡G
1. Transmission line characteristic impedance Z=50£[.
2. R1, R2, R3, R4, R5, R6 as close to SerDes IC as possibl
3. R7, R8 as close to 1X9 Transceiver as possible.