1.25Gbps Burst Mode GEPON ONU
Small Form Factor BIDI Transceiver

Features

- Compliant with IEEE 802.3ah
- Burst mode transmitter
- Continuous mode receiver
- Industrial standard SFF 2 X 5 pin footprint
- SC/ST/FC connector interface
- Transmitter disable function
- Receiver signal detect function
- Single supply 3.3V

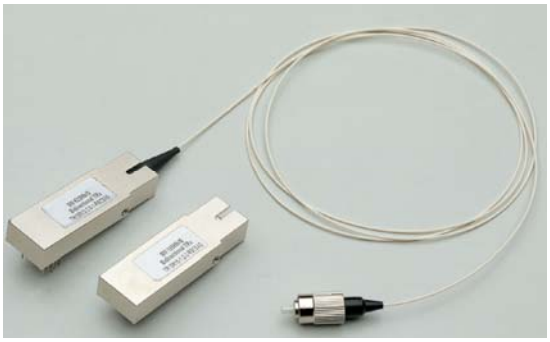

Specifications

Parameter	Symbol	Min.	Typ.	Max.	Unit
Transmitter					
Data Rate (NRZ)	B	-	1.25	-	Gb/s
Optical Output Power (avg.) (1) (2) (3)	P_O	-3	-	+2	dBm
Extinction Ratio	ER	6	-	-	dB
Optical Wavelength	λ_C	1270	1310	1360	nm
Spectral Width					
1310nm FP LD (RMS)	$\Delta\lambda$	-	-	2.5	nm
1310nm DFB LD (-20dB)	$\Delta\lambda$	-	-	1	nm
Side Mode Suppression Ratio					
1310nm DFB LD	SMSR	30	-	-	dB
Output Rise Time (20-80%)	t_r	-	-	0.26	ns
Output Fall Time (20-80%)	t_f	-	-	0.26	ns
Burst Turn On Time (8)	t_{burst_on}	-	-	64	ns
Burst Turn Off Time (8)	t_{burst_off}	-	-	64	ns
Burst Enable Time (8)	t_{burst_en}	600	-	-	ns
Burst Disable Time (8)	t_{burst_dis}	100	-	-	ns
Data Input (6)	V_{IL} V_{IH}	V_{CC} -1.810 V_{CC} -1.165	- -	V_{CC} -1.475 V_{CC} -0.88	V
Tx Disable Input	V_{DIL} V_{DIH}	0 2	- -	0.8 V_{CC}	V
Optical Output Power (avg.) of Tx Disable	P_{Off}	-	-	-45	dBm
Supply Voltage	V_{CC}	3.10	3.3	3.50	V
Supply Current	I_{CC}	-	-	110	mA

Parameter	Symbol	Min.	Typ.	Max.	Unit
Receiver					
Data Rate (NRZ)	B	-	-	1.3	Gb/s
Optical Input (avg.) Sensitivity (1) (5)	P_{IN}	-	-	-25	dBm
Saturation	P_{SAT}	-3	0	-	dBm
Optical Wavelength	λ	1100	-	1600	nm
Output Rise Time (20-80%)	t_r	-	-	0.4	ns
Output Fall Time (20-80%)	t_f	-	-	0.4	ns
Data Output (6)	V_{OL} V_{OH}	V_{CC} -1.840 V_{CC} -1.045	- -	V_{CC} -1.62 V_{CC} -0.88	V
Signal Detect Asserted (avg.)	P_A	-	-	-25	dBm
Signal Detect Deasserted (avg.)	P_D	-35	-	-	dBm
Hysteresis	P_{HYS}	-	2	-	dB
Supply Voltage	V_{CC}	3.10	3.3	3.50	V
Supply Current	I_{CC}	-	-	100	mA

Note:

(1) With 0.275 NA, 9/125μm fiber.
(2) Driven with a differential signal.
(3) Class 1 eye safe per FDA and IEC.
(4) Eye mask diagram is compliant to IEEE802.3ah Eye Diagram
(5) 2^7 -1 PRBS, BER= 10^{-12}.
(6) Compatible with LVPECL logic levels.
(7) The transmitter output should not be viewed directly.
(8) Timing parameter define：

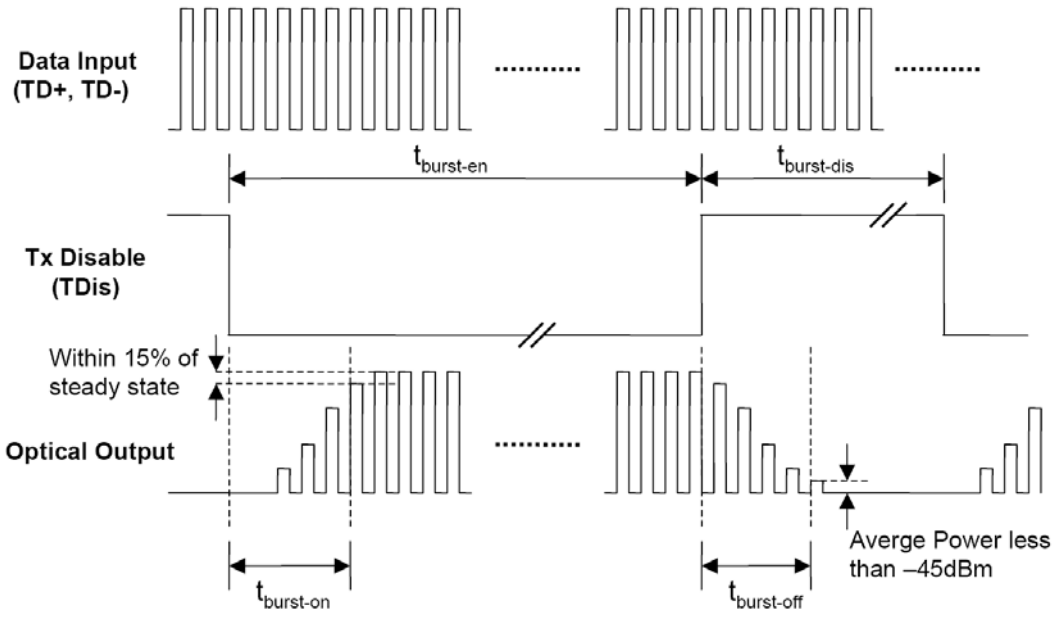

Absolute Maximum Ratings

Parameter	Min.	Max.	Unit
Operating Temperature	0	70	°C
Storage Temperature	-40	85	°C
Lead Soldering Limits	-	240/10	°C/sec
Supply Voltage	-0.2	4	V

Ordering Information

T R □□ R 4 9 - 3 - 3 - 2 □□□ 3 N □ 1

Data Coupling & SD Output Level：

Symbol	Tx Coupling	Rx Coupling	SD
G	DC	DC	PECL
H	DC	DC	TTL
I	DC	AC	PECL
J	DC	AC	TTL

Connector Type：
SC：SC Connector
FC：FC Connector
ST：ST Connector

Package Type：
P：Pigtail
R：Receptacle

Transmitter Wavelength / Laser Type：
13：1310nm (FP LD)
31：1310nm (DFB LD)

Part Number	Laser Type	Transmission distance	Compliant to IEEE 802.3ah
TR13R49-3-3-2□□□3N□1	1310nm, FP	≥10Km	1000BASE-PX-ONU-A
TR31R49-3-3-2□□□3N□1	1310nm, DFB	≥20Km	1000BASE-PX-ONU-B

Outline Drawing

Pigtail 2x5 pins SFF

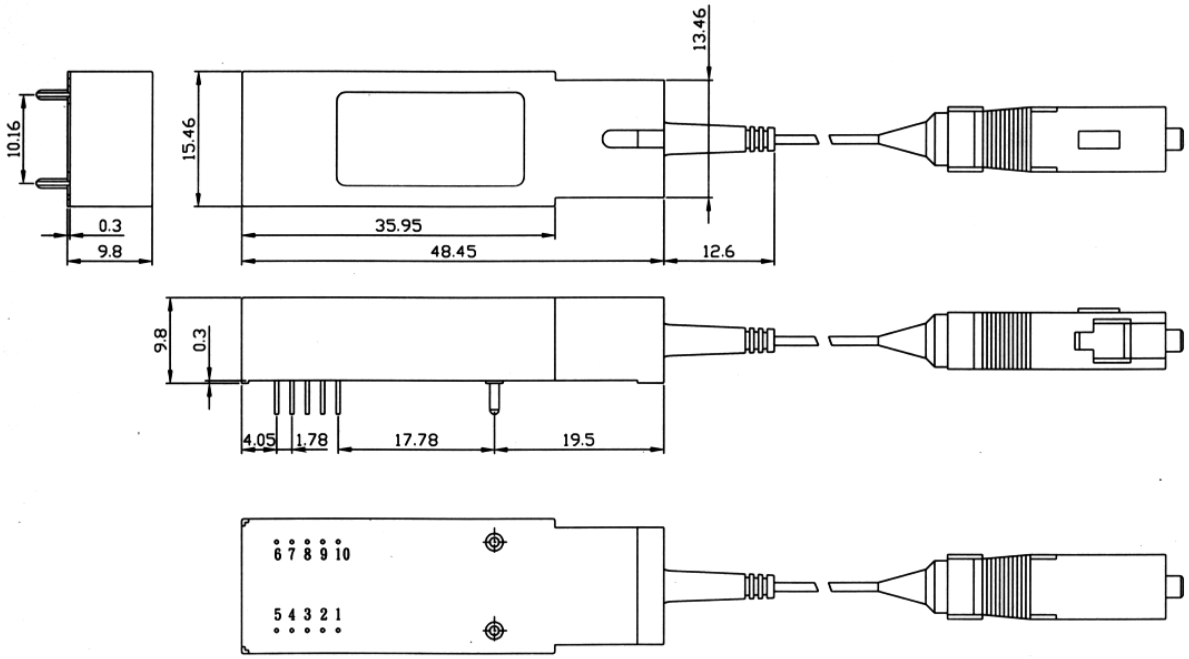

Receptacle 2x5 pins SFF

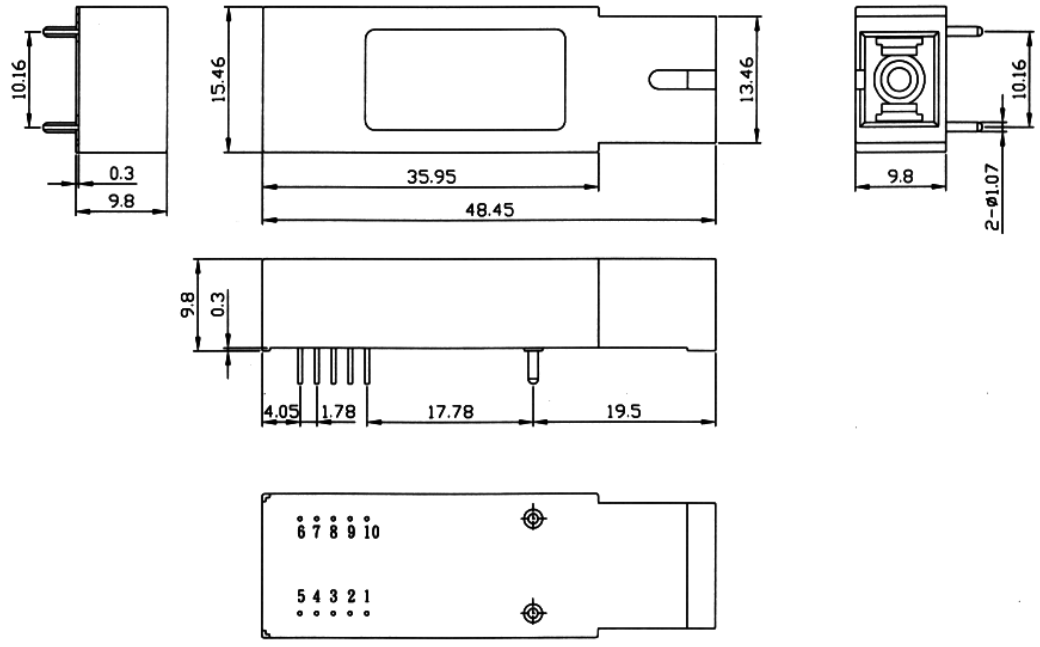

1.25Gbps Burst Mode GEPON ONU
Small Form Factor BIDI Transceiver

Pinout Description

Pin No.	Symbol	Description
1	V_{EER}	Receiver Ground
2	V_{CCR}	Receiver Power Supply
3	SD	Receiver Signal Detect
4	RD-	Receiver Data Out (Inverted)
5	RD+	Receiver Data Out
6	V_{CCT}	Transmitter Power Supply
7	V_{EET}	Transmitter Ground
8	TDis	Input Logic Low Level to Switch Laser “ON” Input Logic High Level to Switch Laser “OFF”
9	TD+	Transmitter Data in
10	TD-	Transmitter Data In (Inverted)

Application Notes

Recommended DC Coupling Interface Circuit¡G

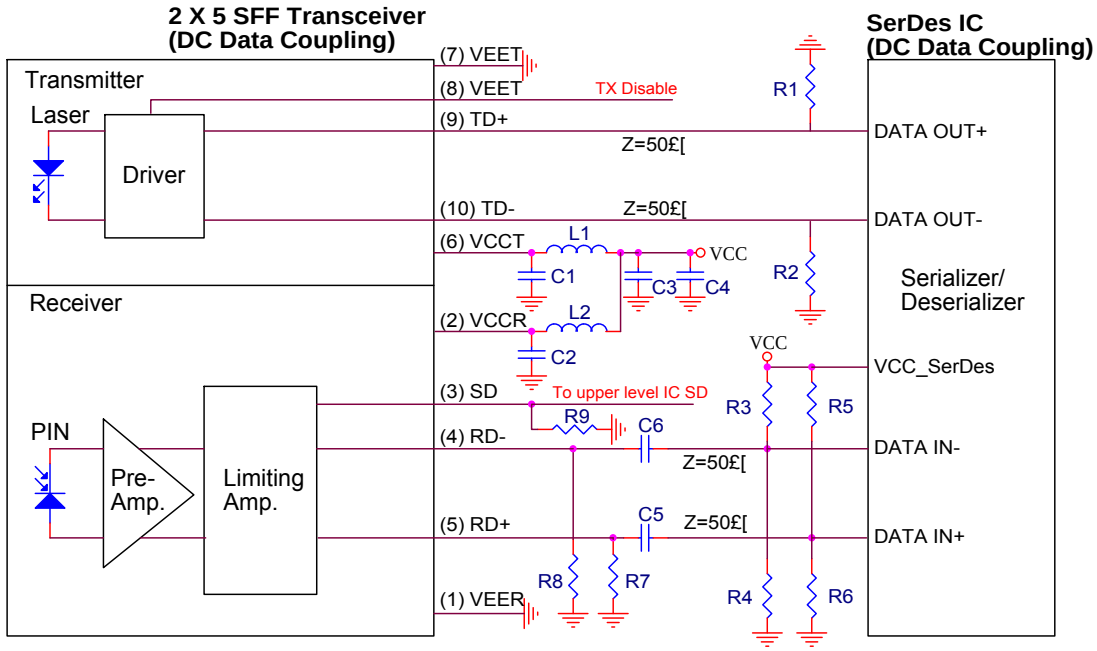

L1=L2=1£gH or ferrite bead
C1=C2=C3=C5=C6=0.1£gF
C4=10£gF
R1, R2, R3, R4, R5, R6 depends on SerDes IC specification.
(Consult the SerDes IC application information)
R7=R8=270£[
R9=510£[

NOTE¡G
1. Transmission line characteristic impedance Z=50£[.
2. R1, R2, R3, R4, R5, R6 as close to SerDes IC as possibl
3. R7, R8 as close to 2X5 Transceiver as possible.